

MICHELIN X[®] COACH™ Z



**ALL
POSITION**



295/80 R 22.5

M+S AND 3PMSF MARKINGS



COST EFFICIENCY
+ 16% MILEAGE **



**VERSATILITY TO
OPTIMISE YOUR UPTIME**



**HIGH LEVEL OF
ROBUSTNESS TO
GUARANTY SAFETY OF YOUR
DRIVERS AND PASSENGERS**

* Radio Frequency Identification chip integrated. ** Internal test (2017): vehicle fitted with 295/80 R22.5 MICHELIN X[®] COACH™ Z compared with vehicle fitted with 295/80 R22.5 MICHELIN X[®] COACH™ HL Z.

**YOUR PARTNER TO OFFER
A PEACE OF MIND JOURNEY**



MICHELIN X[®] COACH[™] Z



BUSINESS EFFICIENCY

OPTIMISE YOUR UPTIME,
REDUCE YOUR COSTS

- Up to 16% more mileage versus previous range**
- Excellent grip in all weather conditions thanks to REGENION technology and 3PMSF marking
- Optimised tyre footprint thanks to INFINICOIL technology



SAFETY

DRIVE WITH PEACE
OF MIND

- High level of robustness
- Reinforced casing for heavy axles thanks to INFINICOIL technology (7.5 t for axles with single tyres)
- Outstanding braking performance until the last mm thanks to REGENION technology



ECOLOGY

A SUSTAINABLE WAY
TO TRANSPORT

- Regroovable tyre
- High level of retreadability
- Tyres manufactured in compliance with ISO 14001 environmental standards

**Internal test (2017): vehicle fitted with 295/80 R22.5 MICHELIN X[®] COACH[™] Z compared with vehicle fitted with 295/80 R22.5 MICHELIN X[®] COACH[™] HL Z.



REGENION

Self-regenerating tread blocks, supported by our mold 3D metal printing techniques, providing solid grip throughout tyre's lifetime and conditions. Michelin won the European Inventor Award 2018 in the industry category with REGENION technology



INFINICOIL

A continuous steel wire – which can be as long as 400 meters – wrapped around the tyre to provide it with greater stability throughout its lifetime. On top of benchmark endurance, tyres designed with INFINICOIL get you more mileage or enhanced fuel savings.

TECHNICAL INFORMATION


EUROPEAN LABELLING

TREAD PATTERN AND DIMENSION	TYPE	LOAD/SPEED INDEX	ORIGINAL TREAD DEPTH	SPECIAL MARKINGS	MICHELIN PREFERRED RIM			
295/80 R 22.5 MICHELIN X [®] COACH [™] Z	TL	154/150M	13 MM	M+S, 3PMSF, TRACTION	8.25	C	B	

REGROOVING INFORMATION

THEORETICAL REGROOVING DEPTH	APPROXIMATE REGROOVING WIDTH	SUGGESTED BLADE
3 mm	8 - 10 mm	R3 OR R4

REGROOVING PATTERN

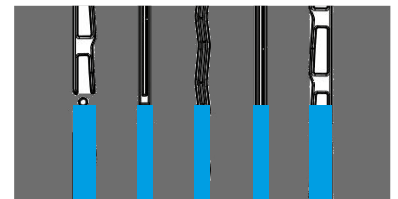

MICHELIN Remix

Regroovable and retreadable Michelin Remix on drive axle.

MICHELIN products are manufactured from high quality materials to high tolerances, ensuring a uniform and consistent performance. Correct application, fitting, inflation and regular inspection of the product are essential to its safe and efficient operation. Remix and the tyre designations mentioned are trademarks of Michelin. For further information about any of the products in this document, contact your local Michelin representative or Technical Liaison helpline on 0845 366 1535.

FIND OUT MORE AND VISIT US ONLINE



WEBSITE
trucks.michelin.com



YOUTUBE
Michelin Trucks and Buses Tyres Europe



BY TELEPHONE
XXXX XXX XXXX



MYACCOUNT
myaccount.michelin.eu



LINKEDIN
Michelin Trucks and Buses Tyres Europe



BY EMAIL
xxx@michelin.com



TWITTER
@MichelinTruckUK



MICHELIN